

FOR ANSCHÜTZ STRAIGHT PULL ACTION MOD. 1727 F, 1827 F & ahg-F27 A

The new ANSCHÜTZ cleaning rod guide facilitates cleaning of the ANSCHÜTZ gun with straight pull action.

Using this cleaning rod guide protects the cartridge chamber and trigger unit from scratches, cleaning agents and residues from the barrel.

The cleaning rod guide is made from high-strength aluminum and black anodized, total weight approx. 140 g. The low weight and length of 200 mm makes this cleaning aid fit in every gun case or soft case.

This cleaning rod guide is suitable for all cleaning rods and attachments up to cal. .22 l.r.

**Cleaning rod guide for mod.
1727 F, 1827 F and ahg-F27 A**
Item No.: 013711



Model 1727 F



Model 1827 F



Model F27 A

Insertion and removal of the cleaning rod guide:




1. Remove the bolt from your firearm (may vary due to the model).



2. Insert the cleaning rod guide into the action and push up against the stopper. See that the groove is pointed in the direction of the trigger (down).



3. Now the cleaning rod guide is inserted correctly. The cleaning rod guide is suitable for all cleaning rods up to cal. .22 l.r.

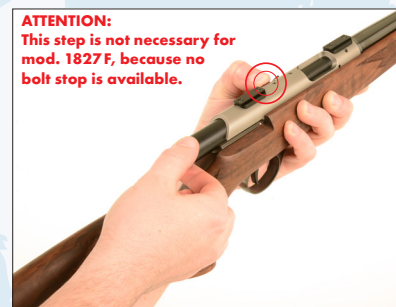

ATTENTION:
This step is not necessary for mod. 1827 F, because no bolt stop is available.

4. To remove the cleaning rod guide from the action, push and hold the bolt stop.



5. Pull the cleaning rod guide out of the action.